


Revisions


Issue	Date	Note
1	09/10/2017	See note 449691919

ASSEMBLY VIEW

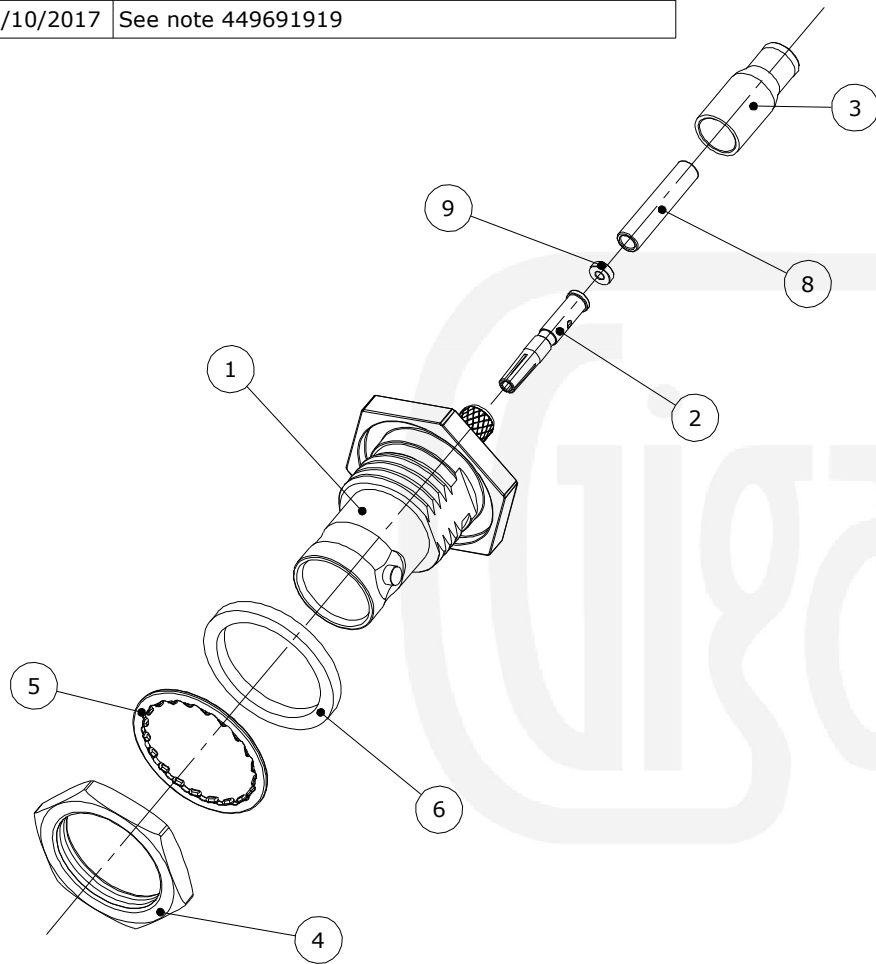


Assembly Instructions

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.

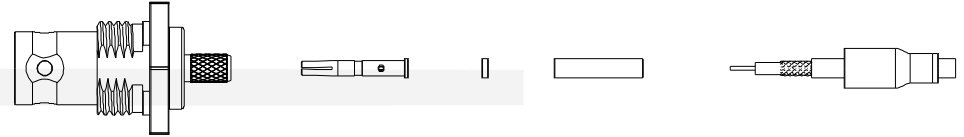

2) Open the cable braid and slide the tube (8) over the dielectric (7) and under the braid. Slide the small insulator (9) over the centre core and crimp the contact (2) onto the centre core and slide the contact into the body until it captivates, ensuring that the cable braid is on the outside of the connector mandril.

3) Slide the ferrule forward and crimp.

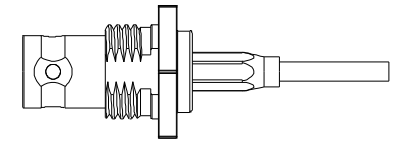


Crimp Hex. Sizes:

4.52mm Hex, 1.69mm Hex

Strip Dimensions:

A=6.6mm, B=4.6mm, C=4.8mm



9	Insulator	PTFE	White
8	Tube	Brass	Nickel
7	Dielectric	Delrin	White
6	Gasket	Rubber	Orange
5	Washer	SS41	Nickel
4	Locknut	Brass	Nickel
3	Ferrule	Brass	Nickel
2	Contact	Brass	Gold
1	Body	Brass	Nickel
	Description	Material	Finish

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author	PJP
Drawn by	PJP
Drawing date	09/10/2017
Checked by	DB
Checked date	11/10/2017
Scale	Not to scale

Part Number BN02-0179-C06-Z
Title: BNC HDTV 12G SDI Crimp Bulkhead Jack, Nickel Plated, RG179, RG179DT