


Revisions

Issue	Date	Note
2	06/01/2025	See GTXPDC/1048

DATASHEET



1. Mechanical


Cable Retention	27N
Fixing Method	Solder
Durability	500 mating cycles
Cable Retention	272N

2. Environmental

RoHS Compliant	Yes
Temperature Range	-65 to +165 degrees C

3. Electrical

Dielectric Withstanding	1000 Volts RMS Maximum
Impedance	50 ohms
Interface Frequency	18 GHz
Working Voltage	500 Volts RMS Maximum

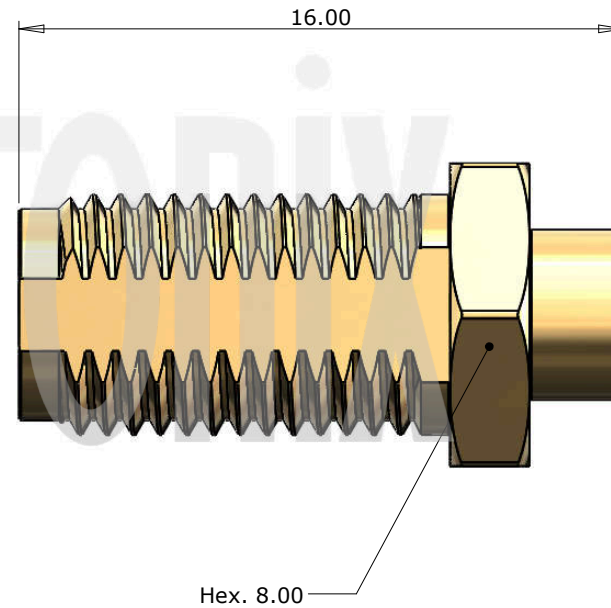

3	Dielectric	PTFE	White
2	Contact	Beryllium Copper	Gold
1	Body	Brass	Gold
	Description	Material	Finish

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author	PJP
Drawn by	PJP
Drawing date	17/11/2022
Checked by	DB
Checked date	17/11/2022
Scale	Not to scale

Part Number	MA10-0402-R01
Title:	SMA Solder Jack, Gold Plated, 8mm Hex Flange, RG402, .141 semi-rigid

Revisions

Issue	Date	Note
2	06/01/2025	See GTXPDC/1048

ASSEMBLY INSTRUCTIONS



Assembly Instructions

1) Strip the cable to the dimensions as shown, taking care not to nick the centre core.




2) Solder the pin onto the centre core and slide the pin into the body, ensuring that the contact is fully located

3) Solder the outer shield of the cable to the connector mandril

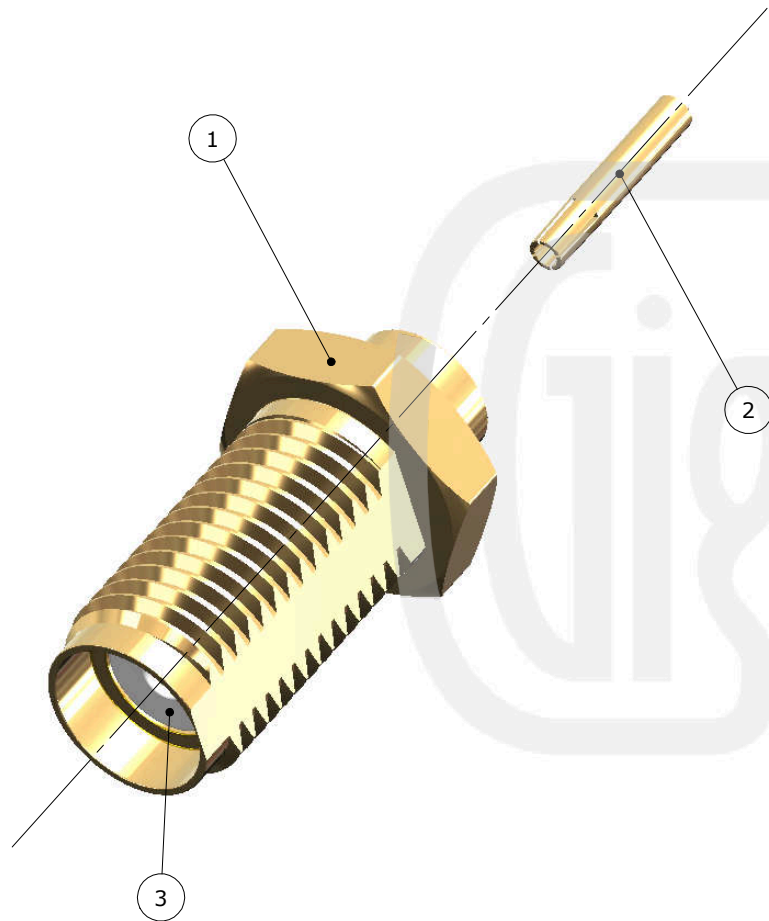

Strip Dimensions:
A=0.0mm, B=3.0mm



3	Dielectric	PTFE	White
2	Contact	Beryllium Copper	Gold
1	Body	Brass	Gold
	Description	Material	Finish

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author	PJP
Drawn by	PJP
Drawing date	17/11/2022
Checked by	DB
Checked date	17/11/2022
Scale	Not to scale

Part Number MA10-0402-R01
Title: SMA Solder Jack, Gold Plated, 8mm Hex Flange, RG402, .141 semi-rigid