| Revisions | | |
|-----------|------------|---------------------|
| Issue | Date | Note |
| 1 | 07/12/2021 | See note GTXPDC/368 |

1. Mechanical

Cable Retention

Durability

Lock Nut Torque

Equal to breaking strain of cable

500 mating cycles

4.0 - 4.5Nm (35-40 in-lbs)



2. Environmental

RoHS Compliant

Temperature Range

Yes

-65 to +165 degrees C

3. Electrical

Dielectric Withstanding

Impedance

Interface Frequency


Working Voltage


1500 Volts RMS Maximum

50 ohms

4 GHz

500 Volts RMS Maximum

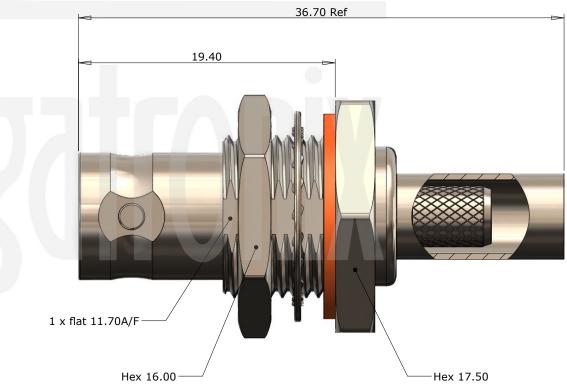



| 7 Washer SS41 Nickel 6 Lock Nut Brass Nickel 5 Gasket Rubber Orange 4 Ferrule Brass Nickel 3 Dielectric PTFE White 2 Contact Brass Gold 1 Body Brass Nickel | |
|---|---|
| 6 Lock Nut Brass Nickel 5 Gasket Rubber Orange 4 Ferrule Brass Nickel 3 Dielectric PTFE White | a |
| 6 Lock Nut Brass Nickel 5 Gasket Rubber Orange 4 Ferrule Brass Nickel | |
| 6 Lock Nut Brass Nickel 5 Gasket Rubber Orange | |
| 6 Lock Nut Brass Nickel | |
| | |
| 7 Washer SS41 Nickel | |
| | |
| | |

Unless otherwise specified tolerances $0.5-5=\pm0.2$ $\times 5-30=\pm0.4$ $\times 30-120=\pm0.6$ $\times 120-315=\pm1.0$ $\times 315-1000=\pm1.6$ Angles $=\pm5^{\circ}$ Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.

| | _ | |
|---------|---------|-----|
| High | tca b | i |
| MOHILL | ΠM | IIV |
| 11117(1 | 111//// | IIA |
| (ai)a | | |
| | IIVII | |

| Author | РЈР |
|--------------|--------------|
| Drawn by | РЈР |
| Drawing date | 07/12/2021 |
| Checked by | DB |
| Checked date | 09/12/2021 |
| Scale | Not to scale |

DATASHEET

Part Number

BN02-0058-C06-4

Title: BNC Crimp Bulkhead Jack, Nickel Plated, PTFE Dielectric, Hex. Flange, RG58, LBC195, URM43

| Revisions | | |
|-----------------|------------|---------------------|
| Issue Date Note | | |
| 1 | 07/12/2021 | See note GTXPDC/368 |

ASSEMBLY INSTRUCTIONS

Assembly Instructions

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.





2) Crimp the contact onto the centre core and then slide the contact into the body until fully located, ensuring that the cable braid is on the outside of the connector mandril.

3) Slide the ferrule forward and crimp.



Crimp Hex. Sizes:

5.41mm Hex, 1.69 Hex

Strip Dimensions:

A=8.0mm, B=6.0mm, C=3.0mm



| | Description | Material | Finish |
|---|-------------|----------|--------|
| 1 | Body | Brass | Nickel |
| 2 | Contact | Brass | Gold |
| 3 | Dielectric | PTFE | White |
| 4 | Ferrule | Brass | Nickel |
| 5 | Gasket | Rubber | Orange |
| 6 | Lock Nut | Brass | Nickel |
| 7 | Washer | SS41 | Nickel |
| | | | |
| | | | |

6

Unless otherwise specified tolerances $0.5-5=\pm0.2$ $>5-30=\pm0.4$ $>30-120=\pm0.6$ $>120-315=\pm1.0$ $>315-1000=\pm1.6$ Angles $=\pm5^{\circ}$ Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



| Author | РЈР |
|--------------|--------------|
| Drawn by | РЈР |
| Drawing date | 07/12/2021 |
| Checked by | DB |
| Checked date | 09/12/2021 |
| Scale | Not to scale |

Part Number

BN02-0058-C06-4

Title: BNC Crimp Bulkhead Jack, Nickel Plated, PTFE Dielectric, Hex. Flange, RG58, LBC195, URM43